

FXR/VFXR A-Series

60Hz, 120V Inverter/Chargers




SEALED (FXR)

VENTED (VFXR)

- Modular, stackable: up to nine units can be combined for three-phase operation and ten in parallel, single-phase or series/parallel, split-phase operation
- Seven different programmable operating modes, with generator assist and seamless reliable backup power
- GridZero operating mode minimizes grid dependence in areas where incentives are changing and utility sell-back is limited
- Sinewave output in 12V, 24V or 48V versions with a typical operating efficiency up to 93%
- Sealed models: 2000VA, 2500VA or 3000VA
Vented models: 2800VA, 3500VA or 3600VA

The industry's most trusted and proven platform for backup power—that's the essence of OutBack Power's FXR Series of inverter/chargers.

Available in power ranges from 2000 to 3600W, multiple units may be stacked and connected with other OutBack Power electronics for seamless system integration and the ability to function in a wide variety of applications, and system sizes. Up to nine inverters can be combined in a 3-phase system with the 12V, 24V or 48V models, and up to 36kW in a grid-tied 24V or 48V system. The exclusive modular system architecture means that increased power output is just an additional FXR inverter/charger away. FXR inverter/chargers can be paired with a MATE3s to add OPTICS RE to monitor and control system performance from any location. Available in sealed or vented units with NEMA type 1 die-cast aluminum chassis, FXR inverter/chargers are designed to operate in the harshest environmental conditions such as high temperatures, humidity or corrosive salt air. FXR inverter/chargers provide absolute dependability in mission-critical installations no matter how harsh or challenging the conditions.

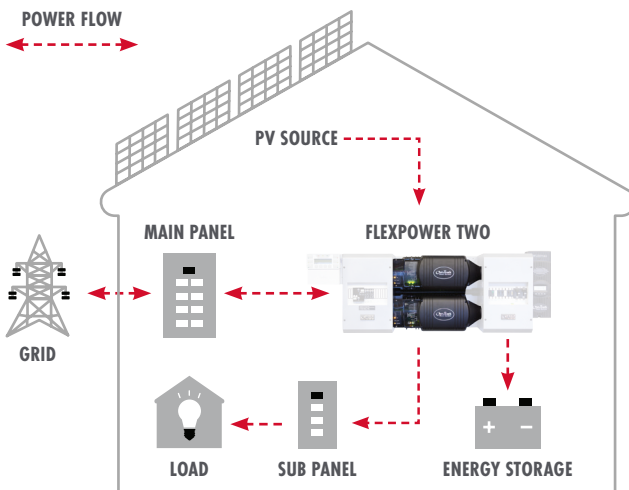

FXR/VFXR A-Series Specifications

Models:	Sealed			Vented		
	FXR2012A	FXR2524A	FXR3048A	VFXR2812A	VFXR3524A	VFXR3648A
Instantaneous Power (100ms)	4800VA	6000VA	6000VA	4800VA	6000VA	6000VA
Surge Power (5 sec)	4500VA	5400VA	5400VA	4500VA	5400VA	5400VA
Peak Power (30 min)	2500VA	3200VA	3200VA	3200VA	4000VA	4000VA
Continuous Power Rating (@ 25°C)	2000VA	2500VA	3000VA	2800VA	3500VA	3600VA
Nominal DC Input Voltage	12VDC	24VDC	48VDC	12VDC	24VDC	48VDC
AC Output Voltage (Selectable)	120VAC (100 to 130VAC)	120VAC (100 to 130VAC)	120VAC (100 to 130VAC)	120VAC (100 to 130VAC)	120VAC (100 to 130VAC)	120VAC (100 to 130VAC)
AC Output Frequency (Selectable)	60Hz (50Hz)	60Hz (50Hz)	60Hz (50Hz)	60Hz (50Hz)	60Hz (50Hz)	60Hz (50Hz)
Continuous AC Output Current (@ 25°C)	16.7AAC	20.8AAC	25AAC	23.3AAC	29.2AAC	30AAC
Idle Power	Full: ≈34W Search: ≈9W Off: ≈3W			Full: ≈34W Search: ≈9W Off: ≈3W		
Typical Efficiency	90%	92%	93%	90%	92%	93%
CEC Weighted Efficiency	Not applicable	Not applicable	91%	Not applicable	90.5%	91%
Total Harmonic Distortion	Typical: <2% Maximum: <5%			Typical: <2% Maximum: <5%		
Output Voltage Regulation	±2.5%	±2.5%	±2.5%	±2.5%	±2.5%	±2.5%
AC Input Voltage Range (MATE3s Adjustable)	85 to 140VAC	85 to 140VAC	85 to 140VAC	85 to 140VAC	85 to 140VAC	85 to 140VAC
AC Input Frequency Range	54 to 66Hz (45 to 55Hz)	54 to 66Hz (45 to 55Hz)	54 to 66Hz (45 to 55Hz)	54 to 66Hz (45 to 55Hz)	54 to 66Hz (45 to 55Hz)	54 to 66Hz (45 to 55Hz)
Grid-Interactive Voltage Range	—	106 to 132VAC	106 to 132VAC	—	106 to 132VAC	106 to 132VAC
Grid-Interactive Frequency Range	—	59.3 to 60.5Hz	59.3 to 60.5Hz	—	59.3 to 60.5Hz	59.3 to 60.5Hz
Maximum AC Input Current	60AAC	60AAC	60AAC	60AAC	60AAC	60AAC
Continuous Battery Charge Output	100ADC	55ADC	35ADC	125ADC	82ADC	45ADC
Maximum Battery Charging	AC: 14AAC DC: 100ADC Power: 1360VA	AC: 14AAC DC: 55ADC Power: 1500VA	AC: 14AAC DC: 35ADC Power: 1900VA	AC: 18AAC DC: 125ADC Power: 1700VA	AC: 20AAC DC: 82ADC Power: 2230VA	AC: 60AAC DC: 45ADC Power: 2450VA
Advanced Battery Charging	Flooded, gel, AGM, lithium-ion and flow chemistry			Flooded, gel, AGM, lithium-ion and flow chemistry		
DC Input Voltage Range	10.5 to 17VDC	21 to 34VDC	42 to 68VDC	10.5 to 17VDC	21 to 34VDC	42 to 68VDC
Accessory Ports	Remote temperature sensor (included), MATE3s and HUB communications			Remote temperature sensor (included), MATE3s and HUB communications		
Warranty	Standard 5 year, extended 10 year available			Standard 5 year, extended 10 year available		
Weight (lb/kg)	Unit: 62 / 29 Shipping: 67 / 30			Unit: 61 / 28 Shipping: 67 / 30		
Dimensions H × W × L (in/cm)	Unit: 13 × 8.25 × 16.25 / 21.75 × 13 × 22 Shipping: 21.75 × 13 × 22 / 55 × 33 × 56			Unit: 13 × 8.25 × 16.25 / 21.75 × 13 × 22 Shipping: 21.75 × 13 × 22 / 55 × 33 × 56		
Temperature Range	Rated: -20 to 50°C Operating: -40 to 60°C Storage: -40 to 60°C			Rated: -20 to 50°C Operating: -40 to 60°C Storage: -40 to 60°C		
Relative Humidity Rating	93%	93%	93%	93%	93%	93%
Auto-Transfer Switch	UL 1741 testing demonstrates grid-safe operation and inverter is capable of islanding with built-in ATS functionality included internally			UL 1741 testing demonstrates grid-safe operation and inverter is capable of islanding with built-in ATS functionality included internally		
Listings/Certifications	UL1741, CSA C22.2 No. 107.1, UL1778, Annex FF			UL1741, CSA C22.2 No. 107.1, UL1778, Annex FF		
RoHS Compliant	Yes	Yes	Yes	Yes	Yes	Yes



an EnerSys® company

OutBack Power Technologies, Inc. 1628 W Williams Drive, Phoenix, AZ 85027
 Tel: +1 360 435 6030 Technical Support: +1 360 618 4363 Email: sales@outbackpower.com
 For more information visit www.outbackpower.com

© 2020 OutBack Power Technologies, Inc. All Rights Reserved. Trademarks and logos are the property of Alpha Technologies Services, Inc., EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E. & O.E.

06/2020
 #980-0036-01-00 REV C