


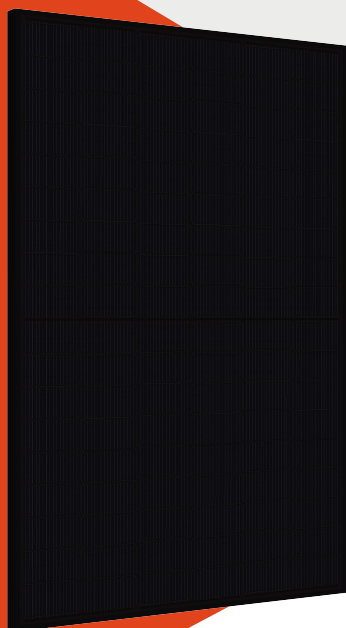

12
YEAR
QUALITY ASSURANCE

30
YEAR
POWER OUTPUT GUARANTEE

VSUN450N-108MH-BB

VSUN450N-108MH-BB

VSUN445N-108MH-BB

VSUN440N-108MH-BB

VSUN435N-108MH-BB

VSUN430N-108MH-BB

VSUN425N-108MH-BB

450W

Highest power output

23.04%

Module efficiency

1.0%

First-year degradation warranty

0.40%

Annual degradation over 30 years

KEY FEATURES

TOPcon TOPcon technology



Higher output power



MBB technology with Circular Ribbon



Positive tolerance offer



Lower risk of hot spot



Better shading tolerance



Better temperature coefficient



Excellent PID Resistance



Lower LCOE



UL 61730 & CSA 61730
IEC 61215 & IEC 61730

ABOUT VSUN

Invested by Fuji Solar, VSUN SOLAR is a solar solution provider with headquartered in Tokyo, Japan that offers reliability, high efficiency solar products and technology globally. VSUN is rated as BNEF Tier 1 PV module manufacturer, PVEL Lab "Best performer" and EcoVadis "Bronze Award".


PRODUCT CERTIFICATION



WARRANTY

Warranty partner

Munich RE

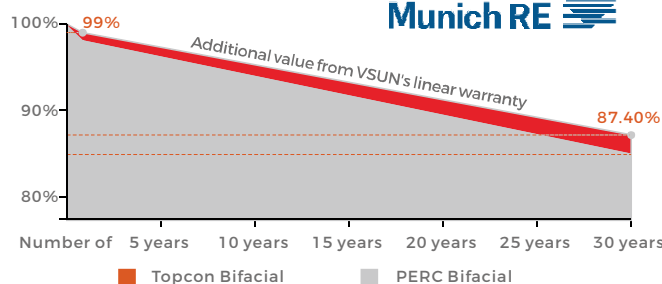

Electrical Characteristics at Standard Test Conditions(STC)

Module Type	VSUN450N-108MH-BB	VSUN445N-108MH-BB	VSUN440N-108MH-BB	VSUN435N-108MH-BB	VSUN430N-108MH-BB	VSUN425N-108MH-BB
Maximum Power - Pmax (W)	450	445	440	435	430	425
Open Circuit Voltage - Voc (V)	39.92	39.64	39.38	39.12	38.84	38.56
Short Circuit Current - Isc (A)	13.96	13.9	13.85	13.8	13.75	13.7
Maximum Power Voltage - Vmpp (V)	33.87	33.61	33.37	33.13	32.88	32.64
Maximum Power Current - Impp (A)	13.29	13.24	13.18	13.13	13.08	13.02
Module Efficiency	23.04%	22.79%	22.53%	22.28%	22.02%	21.76%

Standard Test Conditions (STC): irradiance 1,000 W/m²; AM 1.5; module temperature 25°C. Pmax Sorting : 0~5W. Measuring Tolerance: ±3%.

Remark: Electrical data do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Electrical Characteristics at Normal Operating Cell Temperature(NOCT)

Module Type	VSUN450N-108MH-BB	VSUN445N-108MH-BB	VSUN440N-108MH-BB	VSUN435N-108MH-BB	VSUN430N-108MH-BB	VSUN425N-108MH-BB
Maximum Power - Pmax (W)	338.8	335	331.2	327.6	324	320.2
Open Circuit Voltage - Voc (V)	37.6	37.3	37.1	36.9	36.6	36.3
Short Circuit Current - Isc (A)	11.27	11.23	11.19	11.14	11.1	11.06
Maximum Power Voltage - Vmpp (V)	31.6	31.4	31.1	30.9	30.7	30.5
Maximum Power Current - Impp (A)	10.72	10.68	10.64	10.59	10.56	10.51

Normal Operating Cell Temperature(NOCT) : irradiance 800W/m²; wind speed 1 m/s ; ambient temperature 20/°C. Measuring Tolerance: ±3%.

Material Characteristics

Dimensions	1722×1134×30mm (L×W×H) 67.80×44.65×1.18 inches (L×W×H)
Weight	21.4kg / 47.18lbs
Frame	Black anodized aluminum profile
Front Glass	AR-Coating toughened glass, 3.2 mm
Back sheet	Composite film
Cells	12×9 pcs mono solar cells series strings
Junction Box	IP68, 3 diodes
Cable	Potrait: +300mm/-400mm (cable length can be customized) , 1×4mm² or 12AWG

System Design

Maximum System Voltage [V]	1500
Series Fuse Rating [A]	30
Fire Rating	Class C for IEC and TYPE 1 for US
Protection Class	Class II
Temperature Range	-40 °C to + 85 °C
Maximum Surface Load	+5400/-2400 Pa+113/-50 psf
Application class	Class A
Withstanding Hail	Maximum diameter of 25 mm with impact speed of 23 m/s

Packaging

Dimensions(L×W×H)	1760×1125×1253mm / 69.29×44.29×49.33inches
Quantity per pallet	36 pcs
Container 20'	216
Container 40'	468
Container 40'HC	936 or 828 for US

Temperature Characteristics

NOCT	45°C(±2°C)
Voltage Temperature Coefficient	-0.24%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.29%/°C

Dimensions

IV-Curves

